


# TENDICATENA LINEARE CHT - ASFR TN

## LINEAR CHAIN TENSIONER CHT - ASFR TN

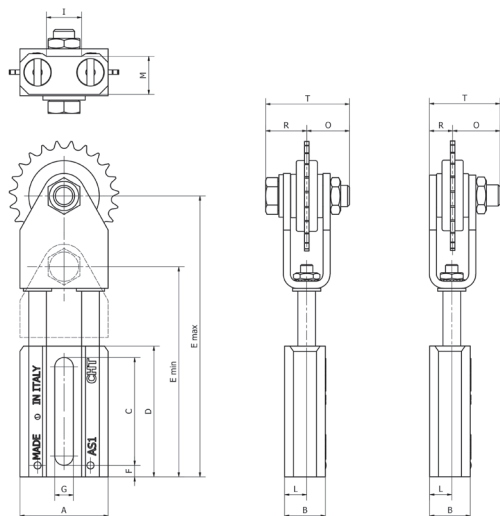

| Tipo<br>Type | Cod. Semplici<br>Part Num. Simple | Newton | A  | B    | C  | D   | E Min | E Max | F   | G    | I    | L    | M    | O    | R    | T  | Peso kg.<br>Weight kg. |
|--------------|-----------------------------------|--------|----|------|----|-----|-------|-------|-----|------|------|------|------|------|------|----|------------------------|
| ASFR1 10 SV  | 94ASFR1SV                         | 280    | 50 | 23   | 61 | 74  | 133   | 157   | 6,5 | 10,5 | 20   | 12,5 | 22   | 22   | 13   | 35 | 0,39                   |
| ASFR1 12     | 94ASFR112                         | 280    | 50 | 23   | 61 | 74  | 133   | 157   | 6,5 | 10,5 | 20   | 12,5 | 22   | 27   | 21   | 48 | 0,39                   |
| ASFR2 10 SV  | 94ASFR2SV                         | 460    | 67 | 28   | 73 | 87  | 161   | 193   | 7   | 12,5 | 25   | 15   | 25,5 | 22   | 13   | 35 | 0,63                   |
| ASFR2 12     | 94ASFR212                         | 460    | 67 | 28   | 73 | 87  | 161   | 193   | 7   | 12,5 | 25   | 15   | 25,5 | 27   | 21   | 48 | 0,63                   |
| ASFR3 12 SV  | 94ASFR3SV                         | 690    | 80 | 32,5 | 88 | 104 | 188   | 225   | 8   | 14,5 | 29,5 | 17,5 | 28,5 | 28,7 | 16,3 | 45 | 1,07                   |
| ASFR3 12     | 94ASFR312                         | 690    | 80 | 32,5 | 88 | 104 | 188   | 225   | 8   | 14,5 | 29,5 | 17,5 | 28,5 | 33   | 17   | 52 | 1,07                   |

### CHT - ASFR TN

- Tenditore ASFR con pignone tendicatena TN.
- Boccole autolubrificanti a secco con PTFE standard.
- Fornibile versione con perni, molle, spine e rondelle inox.
- Fornito completo di bulloneria per il montaggio del pignone tendicatena TN.
- Senza ingombri sul piano d'appoggio per le versioni ASFR-SV completi di vite con testa svasata.

Pignoni tendicatena TN utilizzabili:

ASFR1: DA Z 23 passo 8 x 3 a Z 15 passo 5/8" x 3/8" compresi

ASFR2: DA Z 14 passo 5/8" x 3/8" a Z 15 Passo 3/4" x 7/16" compresi

ASFR3: Z 12 passo 1" x 17 .02

Per dettagli pignone TN vedere pagina 41

### CHT - ASFR TN

- Tensioner ASFR with chain tensioner sprocket TN.
- Dry standard self-lubricating bushings with PTFE.
- Available with Stainless Steel springs, studs, plugs and washers.
- Available with bolts for mounting chain tensioner sprocket TN.
- Without any obstruction on the mounting surface for the ASFR-SV versions, which come with flared head.


Chain tensioner sprocket TN usable:

ASFR1: From Z 23 pitch 8 x 3 to Z 15 pitch 5/8" x 3/8" included

ASFR2: From Z 14 pitch 5/8" x 3/8" a Z 15 pitch 3/4" x 7/16" included

ASFR3: Z 12 pitch 1" x 17 .02

For more information regarding TN Sprocket refer to page 41

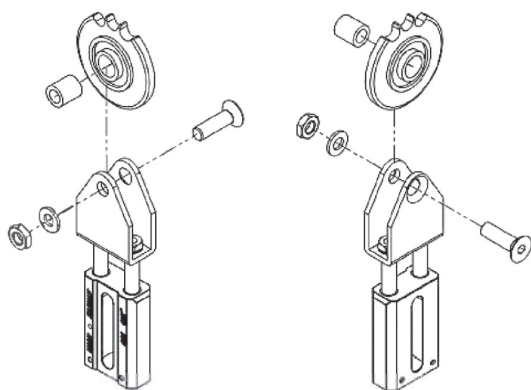

FRONTE FRONT

RETRO BACK

ASFR1 10 SV  
ASFR2 10 SV  
ASFR2 12 SV

